


SLPK05165



Description:

Strata-Tac's SLPK05165 is a polycoated layflat liner. The PE coating on both sides provides excellent moisture and dimensional stability, as well as consistent release.

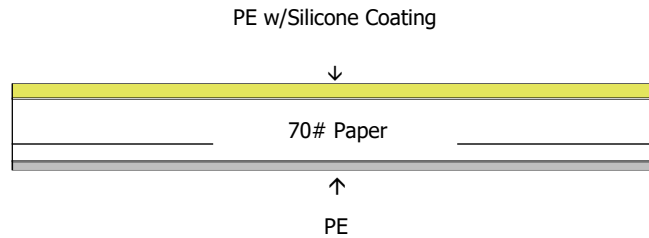

Characteristic	method	Dimension	typical value
Grammage	DIN EN ISO 536	g/m ²	145
Thickness	DIN EN ISO 534	µm	165
Moisture	Intern No. 251	%	6,7
PE coat weight fs	Intern No. 313	g/m ²	20
PE coat weight rs	Intern No. 313	g/m ²	20
Release test A7475 fs	Intern No. 752	cN / 25mm	32
Tensile strength MD*	ISO 1924-1	N / 15mm	150
Tensile strength CD*	ISO 1924-1	N / 15mm	90
Elongation MD*	ISO 1924-1	%	2,8
Elongation CD*	ISO 1924-1	%	6,0

Processing Statement

- Typical properties should be referenced as a general guide, not as a guarantee.
- The information contained herein and recommended applications for use are for reference and comparison purposes only and to the best of our knowledge are accurate and reliable.
- Testing should be completed on material based on individual customer systems, efficiencies, temperatures and applications